



MF-SKD Metal Deck Fastener

Recommended use

- For fastening of sprinkler pipes to max 2" diameter on metal decking.
- For fastening of Ventilation ducts
- For fastening of electrical fittings and light channels

Recommended loads

- For sprinkler applications is according to VdS standards the following recommended $t \geq 0.63$ mm with a recommended load of 0.8kN for pipes up to 2" diameter.
- Other applications on metal decking $t \geq 0.63$ mm and recommended load of 1.0kN
If the base material strength is not the limiting factor for the load, then the recommended loads are 10.0 kN (M8) and 12.0 kN (M10)

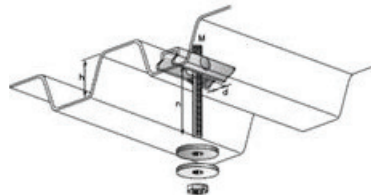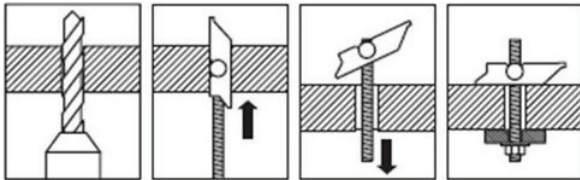

Installation:

Diameter x Length [mm]	Hole Dia. d [mm]	Clearance Height h [mm]	Length of rod below rib Max n [mm]	Tightening Torque	Ordering Designation Tinst [Nm]	Item No	Box Quantity
M 8 x 100	22	90	65	5	MF-SKD-M 8 x 100	230604	25
M 8 x 200	22	90	165	5	MF-SKD-M 8 x 200	230605	25
M 10 x 100	25	90	65	8	MF-SKD-M 10 x 100	230608	25
M 10 x 200	25	90	165	8	MF-SKD-M 10 x 200	230609	25